





DRL 10 B 180 FSD (907 401)

Lightning current arrester for use as plug-in SPD block with integrated LSA disconnection block function
Visual fault indicator of the gas discharge tubes
Can be combined to a combined lightning current and surge arrester by means of a DRL protective plug
For installation in conformity with the lightning protection zones concept at the boundaries from 0_A –1 and higher

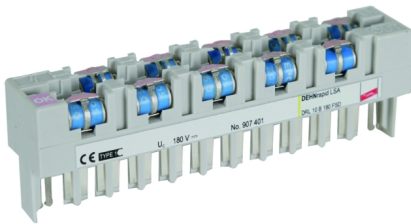

Basic circuit diagram DRL 10 B FSD

Lightning current carrying DRL plug-in SPD block (10 pairs) for almost all applications. It can be combined to a combined lightning current and surge arrester by means of a DRL protective plug. The integrated disconnection block contacts allow testing, measuring and patching in case of plugged-in protection. The three-pole gas discharge tubes have a fail-safe function with visual fault indicator.

Type	DRL 10 B 180 FSD
Part No.	907 401
Fault indication	visual, colour change
Nominal voltage (U _N)	180 V
Max. continuous operating d.c. voltage (U _C)	180 V
Max. continuous operating a.c. voltage (U _C)	127 V
Nominal current (I _N)	0.4 A
D1 Total lightning impulse current (10/350 µs) (I _{imp})	5 kA
D1 Lightning impulse current (10/350 µs) per line (I _{imp})	2.5 kA
C2 Total nominal discharge current (8/20 µs) (I _n)	10 kA
C2 Nominal discharge current (8/20 µs) per line (I _n)	5 kA
Voltage protection level line-line for I _{imp} D1 (U _p)	≤ 500 V
Voltage protection level line-PG for I _{imp} D1 (U _p)	≤ 500 V
Voltage protection level line-line at 1 kV/µs C3 (U _p)	≤ 500 V
Voltage protection level line-PG at 1 kV/µs C3 (U _p)	≤ 450 V
Series impedance per line	≤ 0.005 ohms
Capacitance line-line (C)	≤ 5 pF
Capacitance line-PG (C)	≤ 5 pF
Fail-safe performance	gas discharge tube with spring contacts
Operating temperature range	-40°C...+80°C
Degree of protection	IP 10
Plugs into	LSA disconnection block 2/10
Earthing via	mounting frame
Enclosure material	polyamide PA 6.6
Colour	grey
Test standards	IEC 61643-21 / EN 61643-21
Approvals	VdS, GOST
Weight	69 g
Customs tariff number	85363010
GTIN	4013364107564
PU	10 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.