


manufacturer test report

testing according to DIN EN 50164-1 (VDE 0185 part 201)

Falzklemme Part No. 365 227

material: Cu

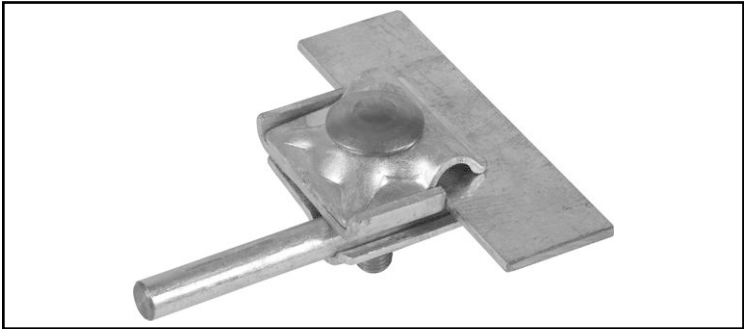

non-binding figure

application: overground

conductor connected	test result
1st conductor : Rd 8 Cu 2nd conductor : FI 30x0,7 Cu	H
1st conductor : Rd 8 NIRO 2nd conductor : FI 30x0,7 NIRO	N

caption

withstand lightning current class H 100 kA (10/350 µs)  
withstand lightning current class N 50 kA (10/350 µs)  
Detailed data of testing conditions can be requested on demand.