


manufacturer test report

testing according to DIN EN 50164-1 (VDE 0185 part 201)

Falzklemme Part No. 365 220

material: St/tZn

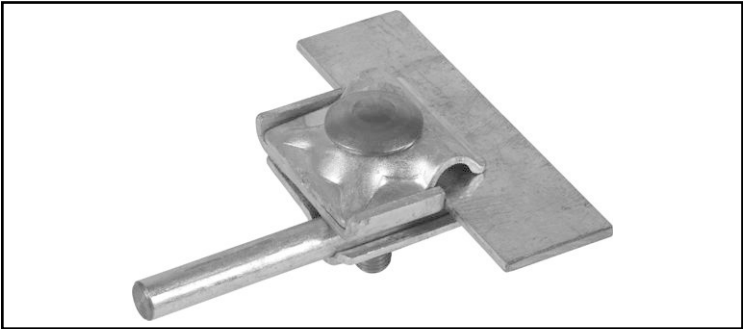

non-binding figure

application: overground

conductor connected	test result
1st conductor : Rd 8 Al 2nd conductor : FI 30x0,7 Al	N
1st conductor : Rd 8 St/tZn 2nd conductor : FI 30x0,7 St/tZn	N
1st conductor : Rd 10 NIRO 2nd conductor : FI 30x2 NIRO	N

caption

withstand lightning current class H 100 kA (10/350 µs)
withstand lightning current class N 50 kA (10/350 µs)
Detailed data of testing conditions can be requested on demand.