



(800 008)

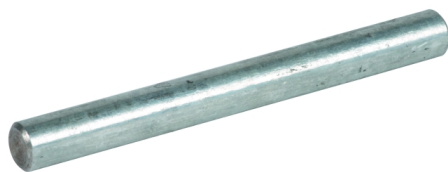


Figure without obligation

Steel wire according to EN 50164-2 with zinc coating  $\geq 50 \mu\text{m}$  average (about 350 g/m<sup>2</sup>), for use as air-termination or down conductor in lightning protection systems.

Part No.	800 008 ✓
Ø Conductor	8 mm
Cross section	50 mm <sup>2</sup>
Material	St/tZn
Standard	EN 50164-2
Zinc coating	$\geq 50 \mu\text{m}$ average (about 350g/m <sup>2</sup> )
Specific conductivity	$\geq 6.66 \text{ m} / \text{Ohm mm}^2$
Specific resistance	$\leq 0.15 \text{ Ohm mm}^2 / \text{m}$
Weight	50 kg
Customs tariff number	72172030
GTIN	4013364018716
PU	127 m

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Conductor materials will be delivered in original coil weights only.

More conductor materials and components as specified in the standard series EN 50164-2 on request.