


## STC 230 (924 350)


- Acoustic fault indication
- For installation in standard earthed socket outlets
- Independent of the the socket outlet design



Figure without obligation

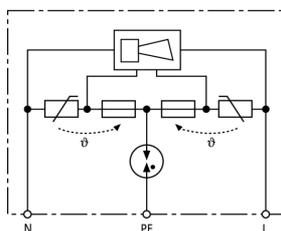

Basic circuit diagram STC 230

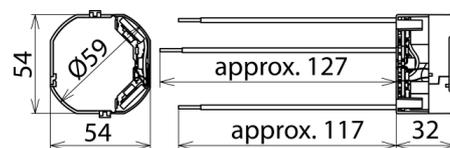

Dimension drawing STC 230

Two-pole surge arrester to be snapped on earthed socket outlets.

| Type   | STC 230                                    |
|--|--|
| Part No.   | 924 350                                    |
| SPD according to EN 61643-11 / IEC 61643-11  | type 3 / class III                         |
| Nominal a.c. voltage ( $U_N$ )   | 230 V (50 / 60 Hz)                         |
| Max. continuous operating a.c. voltage ( $U_C$ )   | 255 V (50 / 60 Hz)                         |
| Nominal discharge current (8/20 $\mu$ s) ( $I_n$ )   | 3 kA                                       |
| Total discharge current (8/20 $\mu$ s) [L+N-PE] ( $I_{total}$ )                              | 5 kA                                       |
| Combination wave ( $U_{OC}$ )  | 6 kV                                       |
| Combination wave [L+N-PE] ( $U_{OC total}$ )   | 10 kV                                      |
| Voltage protection level [L-N] ( $U_P$ )   | $\leq 1.25$ kV                             |
| Voltage protection level [L/N-PE] ( $U_P$ )  | $\leq 1.5$ kV                              |
| Response time [L-N] ( $t_A$ )  | $\leq 25$ ns                               |
| Response time [L/N-PE] ( $t_A$ )   | $\leq 100$ ns                              |
| Max. mains-side overcurrent protection   | B 16 A                                     |
| Short-circuit withstand capability for max. mains-side overcurrent protection ( $I_{SCCR}$ ) | 1 kA <sub>rms</sub>                        |
| Temporary overvoltage (TOV) [L-N] ( $U_T$ ) – Characteristic                                 | 335 V / 5 sec. – withstand                 |
| Temporary overvoltage (TOV) [L-N] ( $U_T$ ) – Characteristic                                 | 440 V / 120 min. – safe failure            |
| Temporary overvoltage (TOV) [L/N-PE] ( $U_T$ ) – Characteristic                              | 335 V / 120 min. – withstand               |
| Temporary overvoltage (TOV) [L/N-PE] ( $U_T$ ) – Characteristic                              | 440 V / 5 sec. – withstand                 |
| Temporary overvoltage (TOV) [L+N-PE] ( $U_T$ ) – Characteristic                              | 1200 V + $U_{REF}$ / 200 ms – safe failure |
| Operating temperature range ( $T_U$ )  | -25 °C ... +40 °C                          |
| Fault indication   | acoustic signal on                         |
| Number of ports  | 1  |
| Terminal wires   | 1 mm <sup>2</sup> , 120 mm long            |
| For mounting on  | standard earthed socket outlets            |
| Enclosure material   | thermoplastic, red, UL 94 V-2              |
| Place of installation  | indoor installation                        |
| Degree of protection of installed device   | IP 20                                      |
| Dimensions   | 54 x 54 x 32 mm                            |
| Indication of disconnecter   | acoustic signal on                         |
| Weight   | 34 g                                       |
| Customs tariff number  | 85363010                                   |
| GTIN   | 4013364076709                              |
| PU   | 1 pc(s)                                    |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.